



# DXLink™ HDMI Receiver Module

AVB-RX-DXLINK-HDMI (FG1010-500)



## Overview

The DXLink HDMI Receiver features built-in SmartScale® Technology to deliver HDMI with HDCP that is perfectly scaled for each connected display automatically, eliminating the integration challenges that can occur when sources and displays have different optimal resolutions. It accepts audio, video, control and Ethernet over one standard twisted pair cable up to 100 meters away from a compatible Enova DVX All-In-One Presentation Switcher, DXLink Transmitter Module or DXLink Wallplate; it accepts all this plus power over the same twisted pair cable when used in conjunction with the Enova DGX 8/16/32/64 Digital Media Switchers, Enova DVX-2150HD or DVX-2155HD. Mount the low-profile DXLink Receiver behind a display or above a ceiling mounted projector and control it using the built in RS-232 or IR ports. Plus monitor the connected display's settings, and send IR control signals back to the head end using the same twisted pair cable.

## Common Applications

The DXLink HDMI Receiver Module receives HDMI and control signals from a remote DXLink Transmitter Module, DXLink Wallplate, Enova DGX or compatible Enova DVX. The receivers built-in control ports can be used to control a destination device and the ICS Lan port provides IP an access point with used in conjunction with the Enova DGX or compatible Enova DVX.

## Features

- **Only One Cable** – Receive audio and video while passing control Ethernet and power over one twisted pair cable
- **SmartScale Technology** – Automatically responds to the display's declared EDID information and scales the video to the best resolution and video parameters for that display without manual setup; this prevents inferior video quality when sources are forced to lower resolutions to support the least capable display in the system
- **Native NetLinx® Control Everywhere** - Control connected destination devices using the built-in IR and RS-232 ports
- **Standard Twisted Pair Cable** – Save time and effort in installation by leveraging cost effective twisted pair cable, see the [Cabling for Success with DXLink](#) white paper for more details
- **HDCP Compliant**
- **DXLink Direct Connection with DXLink Wallplates** – When DXLink Wallplates are receiving Power over DXLink\* from the PS-POE-AT-TC or PDXL-2, they can be connected directly to a DXLink Receiver for a point-to-point solution

\* AMX only supports the following DXLink Power sourcing devices: Enova DGX 8/16/32/64 Digital Media Switcher, Compatible Enova DVX All-In-One Presentation Switcher (Enova DVX-2150HD or DVX-2155HD), PS-POE-AT-TC High Power PoE Injector or PDXL-2 Power over DXLink

Controller. AMX only supports the use of these approved Power over DXLink solutions. Other third party power supplies or non-compatible standard PoE solutions may damage the DXLink equipment. The DXLink HDMI RX can also be powered via the included desktop power supply (ENERGY STAR® qualified) with power cord

**Dealer Benefits**

- **HDMI/HDCP with the Simplicity of Analog** - Hassle-free plug-and-play operation eliminates the need for time consuming, cumbersome work-around tools to deal with HDCP key constraints and resolution incompatibilities
- **Exceed Video Quality Expectations** - Integrated SmartScale Technology in the receiver automatically scales the video, ensuring the highest resolution possible to each display
- **Simplified Design and Installation** - Audio, video, control, Ethernet and power are distributed over one twisted pair cable speeding up installation at remote endpoints

**Customer Benefits**

- **Picture Perfect** - Prevents degraded video due to incompatibilities between different display resolutions by scaling the video to match each display's preferred resolution using innovative SmartScale Technology
- **Interruption Free Content** - Exclusive InstaGate Pro® Technology allows audio and video to be switched quickly and easily to every connected display without the difficulties typically associated with HDCP
- **Audio, Video and Control Everywhere** - Compact low profile design and remote powering capabilities allows the receiver to be installed in discreet locations out of sight without additional wiring

**Additional Features**

- **Built-in Control Ports** - Control the display using the built-in IR or RS-232 control ports
- **Low Profile Design** - Easily mount behind a display or above a ceiling mounted projector
- **IR Receiver** - Send IR commands back to the Enova DGX or compatible Enova DVX to control source equipment using an IR remote
- **Power Remotely** – Power over DXLink\* is carried over one twisted pair to simplify installation when used with the Enova DGX, Enova DVX, PS-POE-AT-TC or PDXL-2
- **3D Support** - Pass through latest video formats including 3D and Deep Color
- **Ethernet Connectivity** - Provides ICSLan Ethernet support at the Receiver - add Ethernet connectivity to a Touch Panel, plug in a WAP or stream IP audio/video to a Ethernet enabled display

\* AMX only supports the following DXLink Power sourcing devices: Enova DGX 8/16/32/64 Digital Media Switcher, Compatible Enova DVX All-In-One Presentation Switcher (Enova DVX-2150HD or DVX-2155HD), PS-POE-AT-TC High Power PoE Injector or PDXL-2 Power over DXLink Controller. AMX only supports the use of these approved Power over DXLink solutions. Other third party power supplies or non-compatible standard PoE solutions may damage the DXLink equipment. The DXLink HDMI RX can also be powered via the included desktop power supply (ENERGY STAR® qualified) with power cord

**Specifications**

| GENERAL                 |  |
|-------------------------|--|
| Dimensions (HWD)        | 1" x 8 3/4" x 5 1/5" (2.54 x 22.12 cm x 13.08 cm)  |
| Weight                  | Approx. 1.1 lb (0.50 kg)<br>Shipping Weight: Approx. 2.20 lb (1.00 kg)   |
| Mounting Options        | Compatible with all V Style versatile mounting options including rack, surface or pole   |
| Compatible AMX Products | <ul style="list-style-type: none"> <li>• Enova DGX 8/16/32/64 Digital Media Switchers</li> <li>• Enova DVX-3155HD, DVX-3156HD, DVX-2155HD, DVX-3150HD and DVX-2150HD All-In-One Presentation Switchers</li> <li>• DXLink Multi-Format Wallplate Transmitters as a point-to-point solution (when Wallplates are powered by PS-POE-AT-TC or PDXL-2)</li> <li>• DXLink Multi-Format TX Module</li> <li>• PS-POE-AT-TC High Power PoE Injector</li> <li>• PDXL-2 Power over DXLink Controller</li> </ul> |
| MTBF                    | 381,000 hours  |
| Approvals               | CE, FCC, UL, cUL, RoHS / WEEE Compliant  |
| Included Accessories    | Each HDMI RX ships with a desktop power supply   |

|                      |  |
|----------------------|--|
|                      | (ENERGY STAR® qualified) with power cord   |
| Optional Accessories | <p>AVB-VSTYLE-SURFACE-MNT, V Style Module Surface Mount (FG1010-722)</p> <p>AVB-VSTYLE-RMK-1U, V Style Module Tray (FG1010-720)</p> <p>AVB-VSTYLE-RMK-FILL-1U, V Style Module Tray w/fill Plates (FG1010-721)</p> <p>AVB-VSTYLE-POLE-MNT, V Style Module Pole Mount (FG1010-723)</p> <p>CC-NIRC, NetLinX IR Emitter Cable (FG10-000-11)</p> <p>IR03, External IR Receiver Module (FG-IR03)</p> <ul style="list-style-type: none"> <li>•PS-POE-AT-TC High Power PoE Injector (FG423-84)</li> <li>•PDXL-2 Power over DXLink Controller (FG1090-170)</li> </ul> |

| DXLink                           |  |
|----------------------------------|--|
| Transport Layer Throughput (Max) | 10.2 Gbps  |
| Twisted Pair Cable Type          | <p>Shielded Cat6, Cat6A and Cat7</p> <p><b>DXLink twisted pair cable runs for DXLink equipment shall only be run within a common building where a common building is defined as: the walls of the structure(s) are physically connected and the structure(s) share a single ground reference</b></p> <p>For more details and helpful cabling information, reference the white paper titled <a href="#">Cabling for Success with DXLink</a>, or contact your AMX representative</p> |
| Twisted Pair Cable Length        | Up to 328 ft (100 m)   |

| ACTIVE POWER REQUIREMENTS |  |
|---------------------------|--|
| AC Power                  | 100-240 VAC single phase, 50-60 Hz<br>0.6 A @ 115 VAC max  |
| DXLink Power              | <p>Power can also be supplied by a DXLink Power sourcing device such as:</p> <ul style="list-style-type: none"> <li>•Enova DGX 8/16/32/64 Digital Media Switcher (with a DXLink Twisted Pair Output Board installed)</li> <li>•Compatible Enova DVX All-In-One Presentation Switcher (2150HD, 2155HD)</li> <li>•PS-POE-AT-TC High Power PoE Injector</li> <li>•PDXL-2 Power over DXLink Controller</li> </ul> <p>When installed in conjunction with an Enova DGX use the Enova DGX Configuration Tool located at <a href="http://AMX.com/enova">AMX.com/enova</a> to determine the power requirements of the configuration</p> <p><b>AMX only supports the use of these approved Power over DXLink solutions. Other third party power supplies or non-compatible standard PoE solutions may damage the DXLink equipment.</b></p> |
| Power Consumption (Max)   | Local 12V supplied: 18 W<br>Power over DXLink supplied: 15 W   |
| Power Connector           | 2.1 mm DC Power Jack (local power)<br>Included on DXLink Connection (Power over DXLink)  |

| POWER SUPPLY       |  |
|--------------------|--|
| External, Included | Each HDMI RX ships with a desktop power supply |

|                    |   |
|--------------------|---|
| External, Optional | <p>(ENERGY STAR® qualified) with power cord</p> <p>Power can also be supplied by a DXLink Power sourcing device such as:</p> <ul style="list-style-type: none"> <li>•Enova DGX 8/16/32 Digital Media Switcher (with a DXLink Twisted Pair Output Board installed)</li> <li>•Compatible Enova DVX All-In-One Presentation Switcher (2150HD, 2155HD)</li> <li>•PS-POE-AT-TC High Power PoE Injector</li> <li>•PDXL-2 Power over DXLink Controller</li> </ul> <p>When installed in conjunction with an Enova DGX use the Enova DGX Configuration Tool located at <a href="http://AMX.com/enova">AMX.com/enova</a> to determine the power requirements of the configuration</p> <p><b>AMX only supports the use of these approved Power over DXLink solutions. Other third party power supplies or non-compatible standard PoE solutions may damage the DXLink equipment.</b></p> |
|--------------------|---|

| ENVIRONMENTAL           |  |
|-------------------------|--|
| Temperature (Operating) | 32° to 104° F (0° to 40° C)  |
| Temperature (Storage)   | -22° to 158° F (-30° to 70° C)   |
| Humidity (Operating)    | 5% to 85% RH (non-condensing)  |
| Humidity (Storage)      | 0% to 90% RH (non-condensing)  |
| Heat Dissipation (Max)  | Local 12V supplied: 61 BTU/hr<br>Power over DXLink supplied: 51 BTU/hr |

| FRONT CONNECTORS                   |                      |
|------------------------------------|----------------------|
| Advanced Configuration Interface** | USB Mini-B Connector |

| BACK CONNECTORS              |   |
|------------------------------|---|
| Local Power                  | 2.1 mm DC Power Jack  |
| DXLink Input                 | RJ-45   |
| ICS LAN/Ethernet Port        | RJ-45 Connector, TCP/IP Port (ICS LAN 10/100)   |
| Serial                       | 3.5mm Pluggable Phoenix Terminal Block<br>Bidirectional RS-232<br>Standard NetLinx Baudrate 1200-115k<br>Parity support Odd/Even/None |
| IR Control                   | Port for use with IR03 Receiver (Optional Accessory FG-IR03)<br>Port for use with CC-NIRC Emitter (Optional Accessory FG10-000-11)    |
| USB (HID) Keyboard & Mouse** | USB Type B Connector  |
| HDMI Output                  | HDMI Type A Female  |
| Analog Stereo Output         | 3.5mm Mini-Stereo Jack  |

| CONTROL                            |                      |
|------------------------------------|----------------------|
| Advanced Configuration Interface** | USB Mini-B Connector |

\*\*This feature will be available upon release of a future firmware update

| INDICATORS      |  |
|-----------------|--|
| Power Indicator | Green indicates whether or not the module is powered |


|                         |   |
|-------------------------|---|
|                         | on  |
| Video Indicator         | Green LED indicates the presence of video and audio signals through the module  |
| Audio Indicator         | Green LED indicates the presence of audio signals through the module  |
| Scaling Button and LEDs | 1 push button and 3 green LEDs; use Scaling button to select one of the 3 Scaling options: Bypass, Auto (SmartScale), or Manual. The factory default is Auto (SmartScale). If the RX power cycles, it defaults to the last persisted mode (achieved by pressing scaling button and holding it until the desired scaling mode LED flashes) |
| IR TX Indicator         | Red LED lights during the transmission of IR data via the rear IR port  |
| IR RX Indicator         | Yellow LED lights during the receipt of IR data via the rear IR port  |
| RS-232 TX Indicator     | Red LED shows serial transmit (TX) data activity  |
| RS-232 RX Indicator     | Yellow LED shows serial receive (RX) data activity  |
| LINK/ACT                | Green LED lights when the Ethernet cable is connected and an active link is established. This LED also blinks when receiving Ethernet data packets  |
| Status                  | Green LED lights when the Controller is programmed and communicating properly   |
| CEC Indicator           | Not currently supported   |
| USB Indicator           | Not currently supported   |
| ID Pushbutton           | Places system in NetLinx Device ID assignment mode  |

| <b>HDMI</b>                          |   |
|--------------------------------------|---|
| Compatible Formats                   | HDMI , HDCP, DVI  |
| Signal Type Support                  | HDMI<br>DVI-D (Single Link with HDMI Cable Adapter)   |
| Input Signal Type                    | DXLink from any of the following: DXLink HDMI Transmitter Module, DXLink Multi-Format Transmitter Module, DXLink Multi-Format Transmitter Wallplate, DXLink Enova DGX DXLink Twisted Pair Output Board, Enova DVX-3155HD, DVX-3156HD, DVX-2155HD, DVX-3150HD and DVX-2150HD All-In-One Presentation Switchers |
| Output Signal Type                   | HDMI<br>DVI-D (Single Link with Cable Adapter)  |
| Output Connector                     | HDMI Type A Female  |
| Output Scaling                       | SmartScale or Manual Configuration or Bypass  |
| SmartScale Output Resolution Support | All resolutions between 480p and 1920 x 1200 @ 60 Hz via automatic SmartScale query of the display's declared EDID Detailed Timing Definition   |
| Output Nominal Voltage               | 1.0 Vpp Differential  |
| Output Re-clocking                   | Yes   |
| +5V DDC Pin Output                   | 50 mA when using Enova DXLink Power, 500 mA when using local 12V supply   |
| +5V USB Output                       | 150 mA when using Enova DXLink Power, 500 mA when using local 12V supply  |
| Output Rise Time / Fall Time         | 425 ps typ (20% - 80%)  |
| Propagation Delay (Typ)              | 25 ms when scaling, 5 us when in Bypass mode  |
| HDMI Audio Synchronization           | Video Formats @ 60Hz frame rate: Audio is actively delayed to match video within 9 ms leading to 10 ms lagging when scaling. When in Bypass mode the audio is matched to video within 1 ms.   |



|                                |   |
|--------------------------------|---|
| Data Rate (Max)                | 4.95 Gbps / 6.75 Gbps<br>6.75 Gbps supported when the DXLink HDMI RX Scaler is in Bypass mode and format is 1080p60 or less   |
| Pixel Clock (Max)              | 165 MHz / 225 MHz<br>255 MHz supported when the DXLink HDMI RX Scaler is in Bypass mode and format is 1080p60 or less   |
| Progressive Resolution Support | 480p up to 1920x1200 @ 60 Hz including but not limited to those resolutions show in the DXLink Twisted Pair Transmitters/Receiver Instruction Manual<br><br>If input is interlaced, the scaled output will deinterlace video to a progressive resolution format. If in scaler Bypass mode interlaced input will pass through unaltered  |
| Deep Color Support             | 24-bit, 30-bit, 36-bit<br>30-bit and 36-bit supported when the DXLink HDMI RX Scaler is in Bypass mode and format is 1080p60 or less  |
| Color Space Support            | RGB: 4:4:4<br>YCbCr 4:4:4: and 4:2:2<br><br>Input signal support for YCbCr 4:4:4 and 4:2:2, output color-space is converted to RGB 4:4:4  |
| 3D Format Support              | Yes (HDMI Primary Formats)<br>Frame Packing 1080p up to 24Hz<br>Frame Packing 720p up to 50/60Hz<br>Frame Packing 1080i up to 50/60Hz<br>Top-Bottom 1080p up to 24Hz<br>Top-Bottom 720p up to 50/60Hz<br>Side-by-Side Half 1080p up to 50/60Hz<br>Side-by-Side Half 720p up to 50/60Hz<br><br>3D supported when the DXLink HDMI RX Scaler is in Bypass mode and format is 1080p60 or less |
| Audio Format Support           | Dolby TrueHD, Dolby Digital, DTS-HD Master Audio, DTS, 2 CH through 8 CH L-PCM<br>Dolby Digital and DTS support up to 48kHz, 5.1 channels   |
| Audio Resolution               | 16 bit to 24 bit  |
| Audio Sample Rate              | 32 kHz, 44.1 kHz, 48 kHz, 96 kHz, 192kHz  |
| Local Audio Support            | Yes for audio extraction  |
| HDCP Support                   | Yes   |
| CEC Support                    | None  |

| <b>STEREO AUDIO</b>               |  |
|-----------------------------------|--|
| Output Signal Types               | Stereo Analog  |
| Analog Output Level (Max)         | +2 dBu, unbalanced   |
| Analog Output Frequency Response  | < +0 dB to -0.5 dB, 20 Hz to 20 kHz  |
| Analog Audio Output THD+N         | <0.03 %, 1 kHz, -10dBu to +2 dBu   |
| Analog Audio Out SNR              | >85 dB, 20 Hz to 20 kHz Vin=+2dBu  |
| Digital to Analog Reference Level | 0 dBfs = +0 dBu  |
| Audio Synchronization             | Video Formats @ 60Hz frame rate: Audio is actively delayed to match video within 9 ms leading to 10 ms lagging when scaling. When in Bypass mode the audio |


|                   |  |
|-------------------|--|
|                   | is matched to video within 1 ms        |
| Output Connectors | 3.5mm Mini-Stereo Jack (Analog Stereo) |

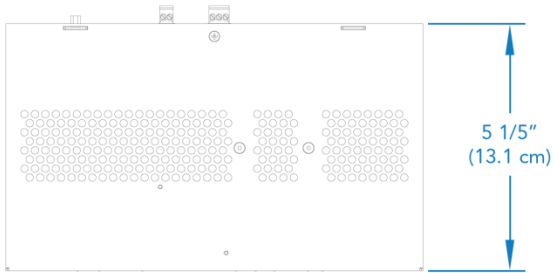

AVB-RX-DXLINK-HDMI  
(Top View)

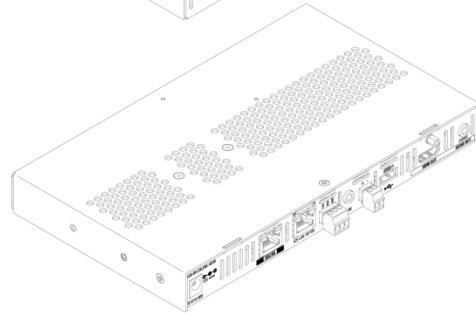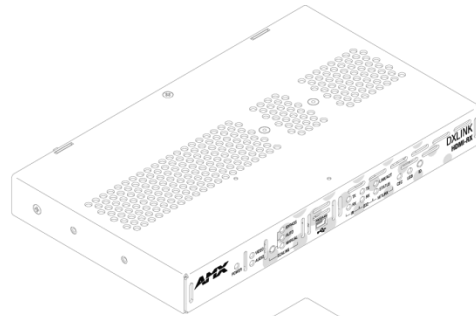


AVB-RX-DXLINK-HDMI  
(Isometric Views)

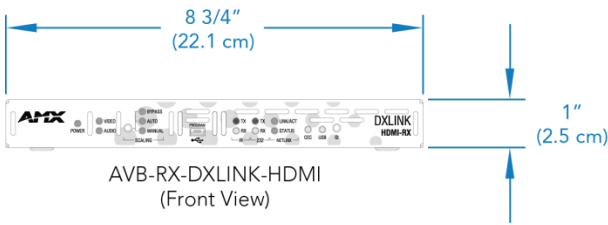

AVB-RX-DXLINK-HDMI  
(Front View)



AVB-RX-DXLINK-HDMI  
(Back View)



AVB-RX-DXLINK-HDMI  
(Right View)

**About AMX**

AMX hardware and software solutions simplify the implementation, maintenance, and use of technology to create effective environments. With the increasing number of technologies and operating platforms at work and home, AMX solves the complexity of managing this technology with reliable, consistent and scalable systems. Our award-winning products span control and automation, system-wide switching and audio/video signal distribution, digital signage and technology management. They are implemented worldwide in conference rooms, homes, classrooms, network operation / command centers, hotels, entertainment venues, broadcast facilities, and more. ©2013 AMX. All rights reserved. **Specifications subject to change. Revised 10-July-13.**

AMX.com | 800.222.0193 | 469.624.8000 | +1.469.624.7400 | fax 469.624.7153