

Poster Screen Series

Create a more Valuable Urban Advertising Media



Let shop window brighter and more clear, let customers experience the scenery outside window, and make each store capture every selling point.


Screen size :
500 x 750 mm
700 x 1000 mm



Key Features


Standardization

Standard display, fixed size and display size.

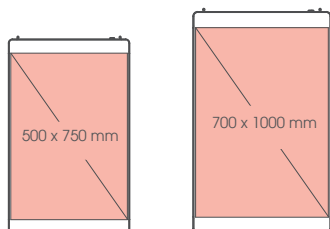

Simple

Simple control, plug and play, simple and deft style, fulfill high effective work.



Freestyle

Randomly applied to each indoor scene, flexible and varied, a trully moving advertising medium.



Process design

Arc line and metal texture, bonding craft and design beauty.



Poster Screen Series

Create a more Valuable Urban Advertising Media



Screen Size

500 x 750 mm
700 x 1000 mm

Application Scenarios

Glass wall

Poster Screen Series

Transparency: 80%, 82%, 85%
Brightness : 3000 cd/m² or 5500 cd/m²
Depth: 37 mm
Viewing Angle: 160°



Super transparent



Smart



Simple




Energy saving

Other Features

Super(or ultra) transparent

More than 85% transparency, the highest transparency in led screen industry.



High contrast ratio

High contrast ratio 1500:1, stunning color, dynamic image and eye-catching.




Smart

Smart control by mobile APP, wireless data transmission, screen+data cloud+APP WIFI connection.




Wider advertising Scope

160° viewing angle, eye- catching and wide scope.



Energy saving

Less than 170W power consumption per square meter.

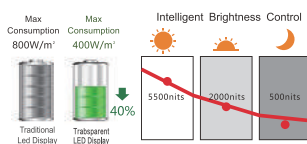

High refresh rate

High refresh rate: in the industry, the minimum pixel pitch (able to mass production) 3mm, 3840HZ refresh rate.

3840 HZ




60 HZ

Dimensions (unit : mm)


P2-E / P3-E

25 Kg/pc / 24 Kg/pc

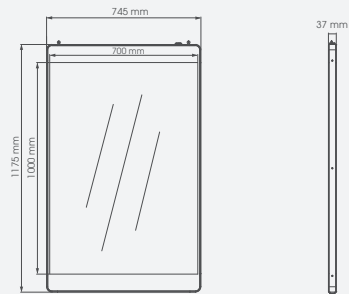


P3-D

12,5 Kg/pc

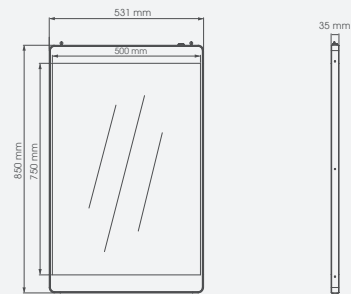

Connectivity

- 1 POWER
- 2 LAN
- 3 WIFI
- 4 USB
- 5 CLOUDS
- 6 HEADSET
- 7 RESET
- 8 HDMI

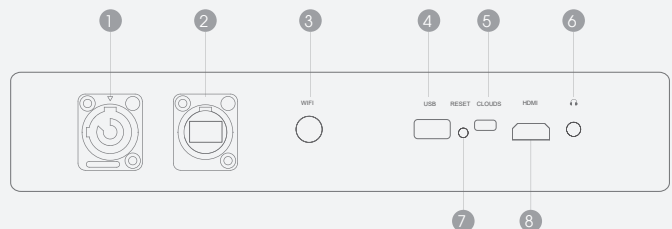

Specifications

Model	P2-E	P3-E	P3-D
	700 x 1000 mm	700 x 1000 mm	500 x 750 mm
Pixel Pitch (mm)	2.87 x 5.74	3.9 x 7.8	3.9 x 7.8
Pixel Density (dot/ m ²)	60552	32768	32768
The overall size(mm)	745 x 1175 x 37	745 x 1175 x 37	531 x 850 x 35
Module Resolution (dot)	244 x 172	178 x 128	128 x 96
LED Type	SMD side emitting	SMD side emitting	SMD 1206 side emitting
Brightness (cd/ m ²)	3000	5500	5500
Transparency	80%	82%	85%
Viewing Angle	160°	160°	160°
Grey Level	14bits	14bits	14bits
Scan Mode	1/6	1/4	1/4
Refresh Rate (Hz)	3840	3840	3840
Frame Frequency (Hz)	60	60	60
Avg.Power Consumption	300	300	150
Max.Power Consumption	1000	1000	400
Maintenance	Back	Back	Back
IP	IP42	IP42	IP45
Working Temp	- 20~50°C	- 20~50°C	- 10~70°C
Weight (kg/ pc)	25	24	12.5

System topology

